

Part No. WCON-SFSEP-XX

26GHz 180° SMA(F) End Launch, PCB Connector/Gold

Features:

- High repeatability
- Low VSWR



Electrical Specification

Frequency	DC-26GHz
VSWR	DC-18GHz:1.2:1(Max.) 18-26GHz:1.3:1(Max.)
Impedance	50 Ohm
Connector Type	SMA Female

Mechanical Specification


Durability	500Cycles
------------	-----------

Material Specification


Body	Brass Plated Gold
Center Contact	Beryllium Copper Plated Gold
Insulator	PTFE

Outline

Unit:mm(inch)

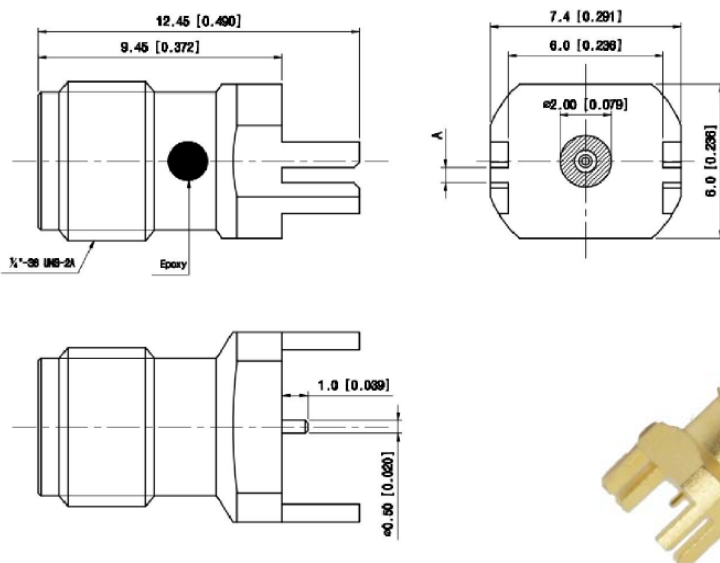

Part No.	A
WCON-SFSEP-0.6	0.6 mm
WCON-SFSEP-0.8	0.8 mm

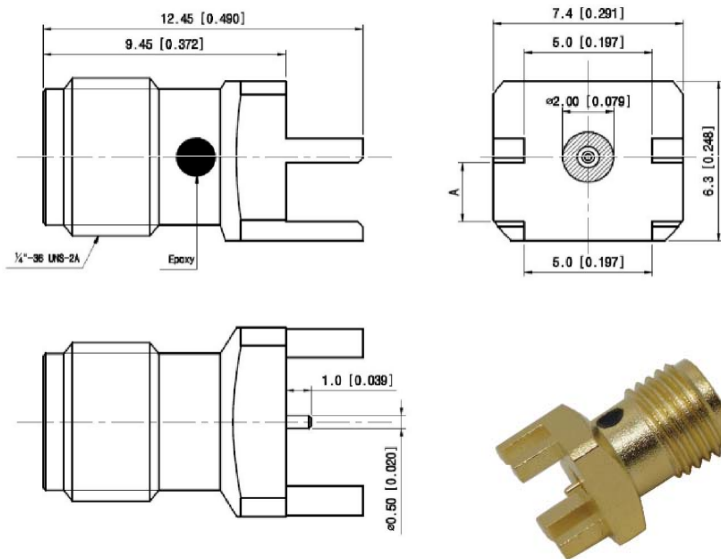

Part No.	A
WCON-SFSEP-1.0	1.0 mm
WCON-SFSEP-1.1	1.1 mm
WCON-SFSEP-1.2	1.2 mm
WCON-SFSEP-1.5	1.5 mm
WCON-SFSEP-1.6	1.6 mm
WCON-SFSEP-1.7	1.7 mm
WCON-SFSEP-2.1	2.1 mm
WCON-SFSEP-2.3	2.3 mm