

Part No. WTER-40240.5

40GHz 0.5W 2.4mm(M) 50Ω Termination

Features:

- Small Size
- Lightweight
- Low VSWR



Electrical Specification


Frequency	DC-40GHz
Impedance	50 Ohm
V.S.W.R	1.25:1 max.
Power Handling	0.5W
Connector Type	2.4mm Male

Material Specification

Housing	SU303F Polished & Passivated
Center Contact	Beryllium Copper Plated Gold
Insulator	PEI

Outline

Unit:mm(inch)

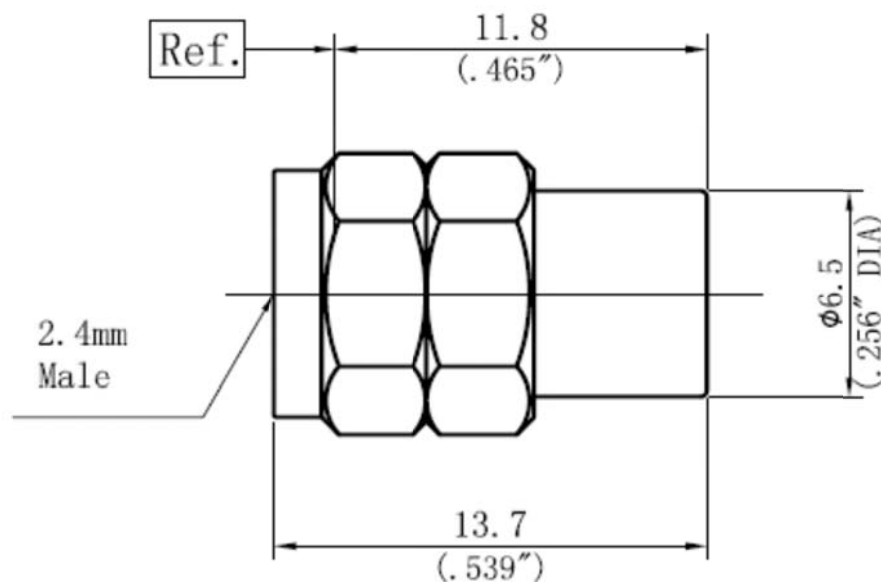

Test Report

