

Part No. WTER-40290.5

40GHz 0.5W 2.92mm(M) 50Ω Termination



Features:

- Small Size
- Lightweight
- Low VSWR




Electrical Specification	
Frequency	DC-40GHz
Impedance	50 Ohm
V.S.W.R	1.2:1 max
Power Handling	0.5W
Connector Type	2.92mm Male

Material Specification	
Housing	SU303F Polished & Passivated
Center Contact	Beryllium Copper Gold Plated
Insulator	PEI

Outline

Unit:mm(inch)

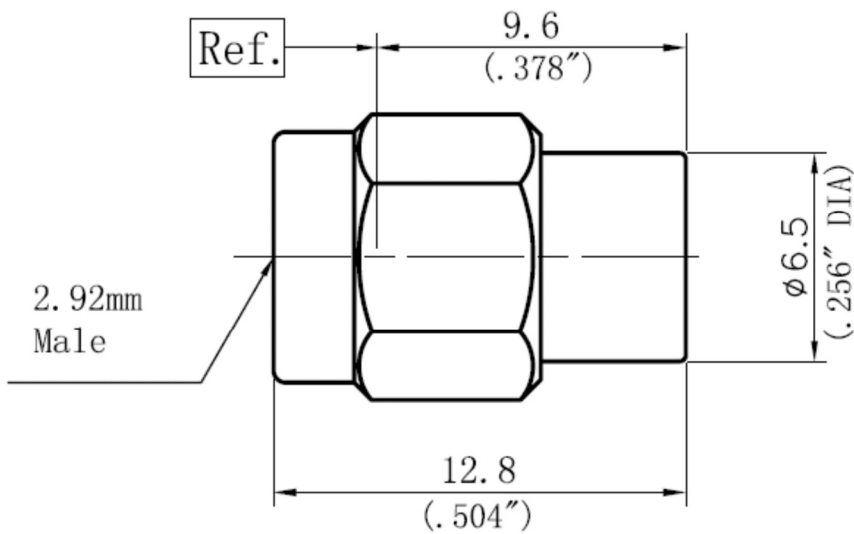

Test Report

