

**Part No. WADP-1.85FWR19**

**40-60GHz 1.85mm(F)-WR19(UG383/U) Waveguide to Coax Adapter**

**Features:**

- High repeatability
- Low VSWR



**Electrical Specification**


Frequency	40-60GHz
Impedance	50 Ohm
VSWR	1.5:1 Max.
Insertion Loss	0.8dB Max.
Waveguide Size	WR19
Waveguide Flange	UG383/U
Coaxial Connection	1.85mm Female

**Material Specification**

Material	Brass
Finish	Gold plating inside

**Outline**

Unit:mm

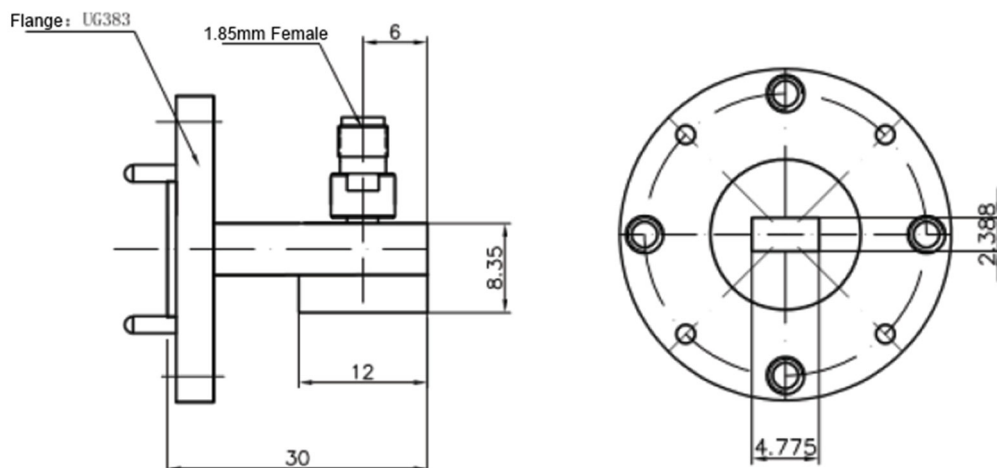

## Test Data

